



Cazaux

Technical Data Sheet || LCE 5/140 ||



# LCE 5/140

100 Series Low Speed Pump

## || CHARACTERISTICS


- ◆ Pump with flexible neoprene impeller
- ◆ Low rotational speed
- ◆ Pump housing in 316L stainless steel, precision foundry
- ◆ Flows: 5 to 140 hl/ h
- ◆ Speed: 50 to 850 rpm
- ◆ Pump on stainless steel trolley
- ◆ Low oxygen dissolution (<0,05mg/L)
- ◆ Direction reversal switch
- ◆ Power : 1,5 kW



## || USE

- ◆ Pumping over
- ◆ Filtration
- ◆ Bottling
- ◆ Descaling
- ◆ Barrel filing


## || PRESSURE/FLOW

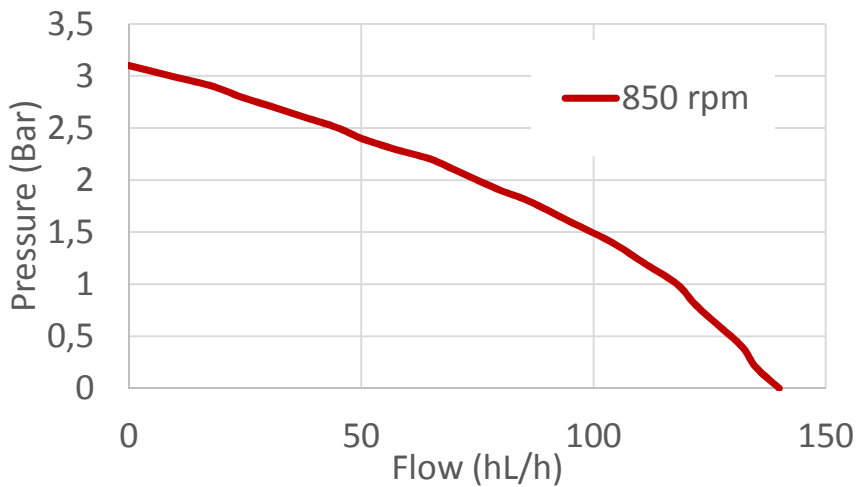

This test was carried out with a 3 meter pipe Ø50, with 15°C water. Pressure losses can be different, depending of the pipe, the characteristics of the pipe, the product conveyed and the impeller.

## || OVERALL DIMENSIONS

Weight : 38kg

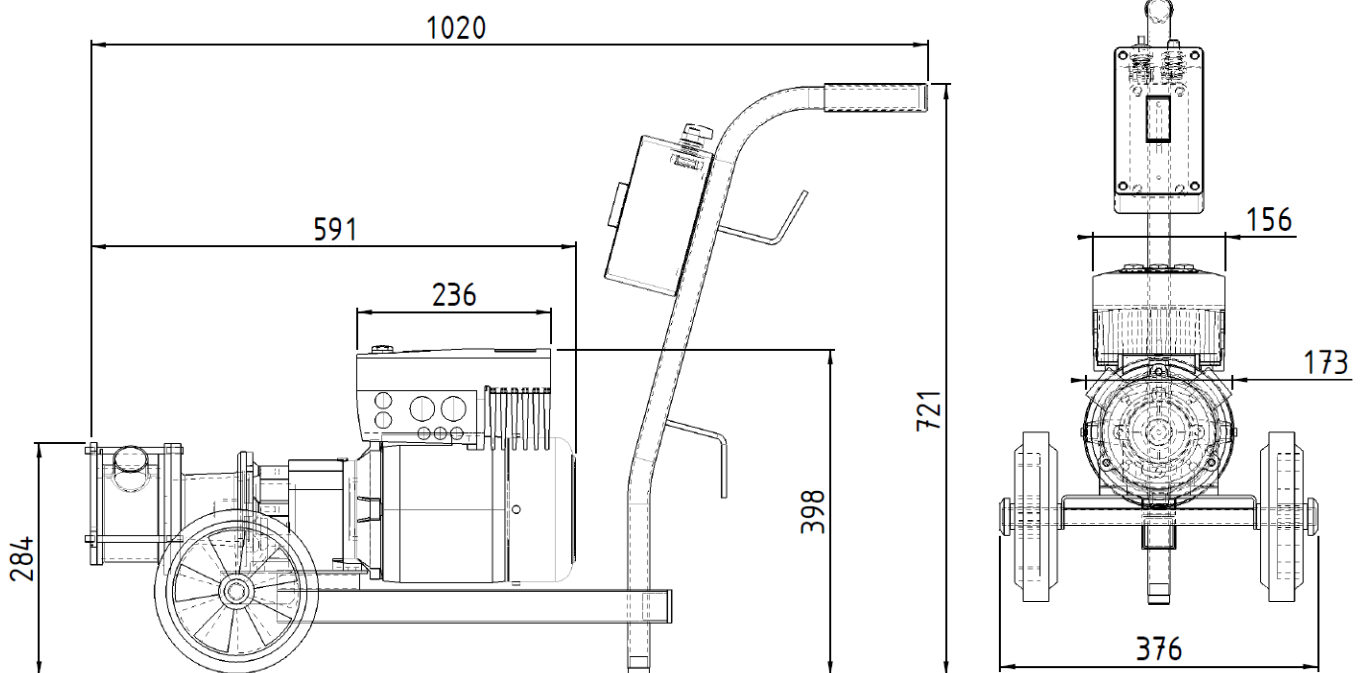

Non-contractual document.